


Helios WL-294-L Eco

white light illuminator with accent lighting







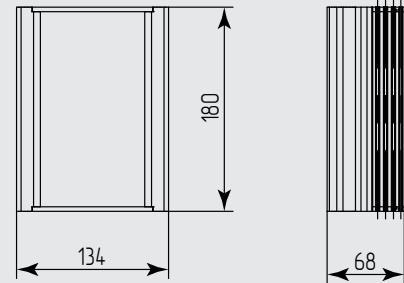


MICROLIGHT



Supply voltage	12...24 V AC/DC
Power consumption	43.0 W
Built-in photocell	yes
Pressure equalization valve	yes
Ingress protection	IP67, IK10
Operation temperature	-40...+50 °C
Weight	1.7 kg



Color temperature, K	5000				
Angle, °	15	30	45	60	90
Luminous flux, lm	3350				
Luminous intensity, cd	62000	16000	7000	4000	1820
Color rendering index, R _A	80				
The level of light at a distance of 10 m, lx	620	160	70	40	18
The level of light at a distance of 15 m, lx	275	71	31	18	8
The level of light at a distance of 20 m, lx	155	40	18	10	5

-  built-in current regulator
-  increased efficiency of removal of heat from the radiating elements
-  high-performance surface-mount LEDs
-  different versions based on the color temperature of light
-  tripping delay photocell to prevent accidental turn off
-  built-in photocell
-  supply voltage 185...265 V AC
-  power over ethernet (UPoE) IEEE 802.3at
-  supply voltage 12...24 V AC/DC

Optional:
 w/o built-in photocell
 screw-thread 1/4" (1/4-20 UNC)
 PoE IEEE 802.3at (UPoE)
 supply voltage 185...265 V AC
 RAL color available

