





Helios WL-294-XXL Eco



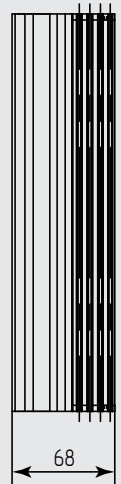

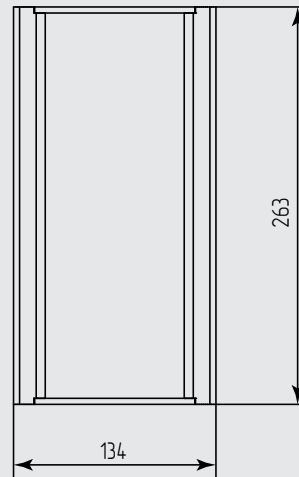



white light illuminator with accent lighting

MICROLIGHT



| | |
|-----------------------------|----------------|
| Supply voltage | 185...265 B AC |
| Power consumption | 71.0 W |
| Built-in photocell | yes |
| Pressure equalization valve | yes |
| Ingress protection | IP67, IK10 |
| Operation temperature | -40...+50 °C |
| Weight | 2.2 kg |

| | | | | | |
|--|--------|-------|-------|------|------|
| Color temperature, K | 5000 | | | | |
| Angle, ° | 15 | 30 | 45 | 60 | 90 |
| Luminous flux, lm | 5580 | | | | |
| Luminous intensity, cd | 103300 | 26600 | 11600 | 6640 | 3030 |
| Color rendering index, R _A | 80 | | | | |
| The level of light at a distance of 15 m, lx | 460 | 118 | 51 | 30 | 13 |
| The level of light at a distance of 20 m, lx | 255 | 66 | 29 | 16 | 8 |
| The level of light at a distance of 25 m, lx | 165 | 42 | 18 | 11 | 5 |

-  built-in current regulator
-  increased efficiency of removal of heat from the radiating elements
-  high-performance surface-mount LEDs
-  different versions based on the color temperature of light
-  tripping delay photocell to prevent accidental turn off
-  built-in photocell
-  supply voltage 185...265 V AC
-  supply voltage 12...24 V AC/DC

Optional:

- w/o built-in photocell
- screw-thread 1/4" (1/4-20 UNC)
- supply voltage 12...24 V AC/DC
- RAL color available

